
POSITION SENSORS
Inductive Sensors

Part number: **SIP000084** Model: **SIP40-A15 NO/NC**

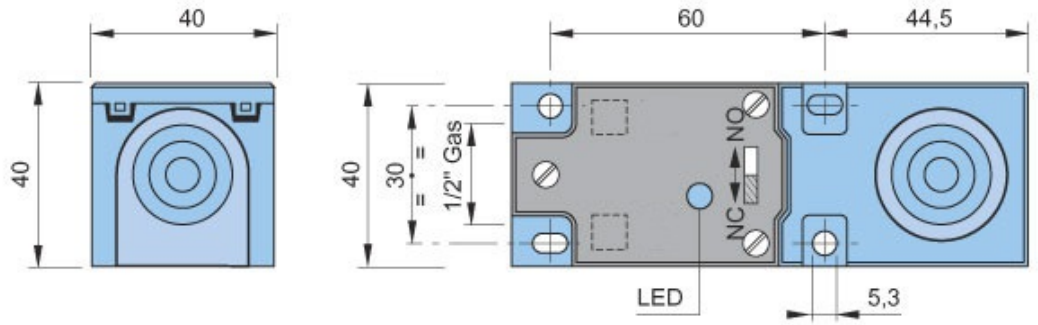

Dimension in mm


1. TECHNICAL CHARACTERISTICS

Electrical data		
Power supply type:		Alternating current
Working voltage:	[V]	20 ÷ 250
Protection class:		III
Outputs		
Function:		NO/NC programmable
Max voltage drop:	[V]	< 6
Max output current:	[mA]	300
Minimum output current:	[mA]	5
Max peak current:	[A]	1.5
Residual current:	[mA]	< 1
Max switching frequency:	[Hz]	12
Detection zone		
Switching distance-Sn:	[mm]	15
Real sensing distance-Sr:	[mm]	15 ±10%
Operative distance-So:	[mm]	0 ÷ 12.15
Accuracy and Deviations		
Correction factor:		Stainless steel: 0.9 - Brass: 0.5 - Aluminium: 0.4 - Copper: 0.4
Hysteresis:	[%Sr]	< 10
Switching point drift:	[%Sr]	-1
Repeatability:	[%Sn]	< 3
Environmental conditions		
Temperature limits:	[°C]	-25°C ÷ +70°C
IP rating:		IP65
Display and control elements		
Display:		Output switching status - 1 x LED: Yellow


Mechanical data		
Housing:		Parallelepiped
Dimensions:	[mm]	40 x 40 x 114
Materials:		Housing: PC blue - Sensing area: PC blue
Mounting:		Embeddable
Weigth:	[g]	200
Electrical connection		
Terminal block:		2-pole terminal block
Compliance to Standards / Directives		
Directives compliance:		2014/30/EU -Electromagnetic compatibility directive (EMC) 2014/35/UE -Low voltage directive (LVD)
Standards compliance:		EN60947-5-2 - Product standard

2. NORME DI INSTALLAZIONE

WIRING DIAGRAM

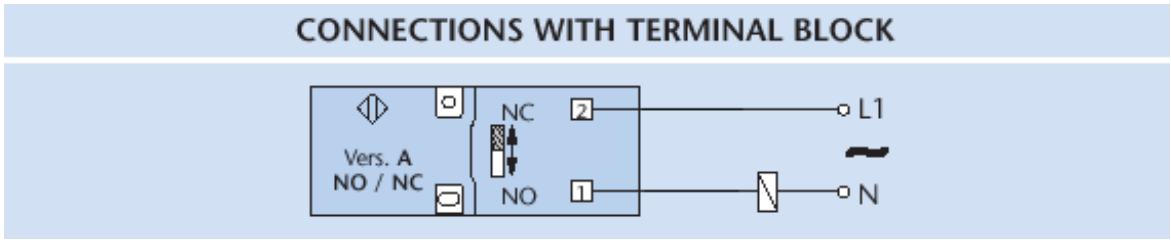


INSTRUCTIONS FOR CORRECT INSTALLATION

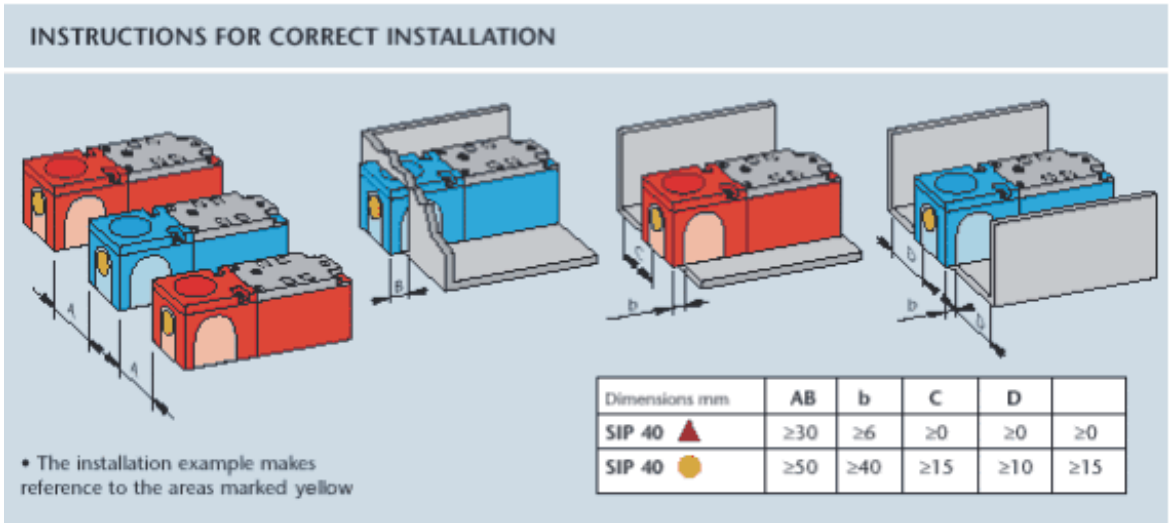

Titolo img 1

ADJUSTABLE SENSITIVITY SIP 40

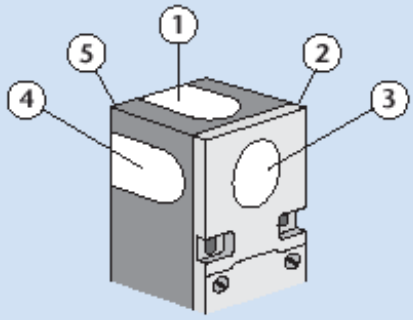

NOTE: In the SIP 40 sensor the oscillator is contained in a module which clips into the body whose surface can then be sensitive on five different positions. The surface chosen can be identified by applying the circular adhesive label.